

CE TEST REPORT

for

Lithium ion cell

Model: YFH18650-2000

(Other models please see the page 3)

Prepared for: Jiangxi province yunfuheng new energy co. LTD
Building 9, Double creation base, yichun economic and technological
development zone, jiangxi province

Prepared by: Shenzhen NCT Testing Technology Co., Ltd
A101&2FB2, Fuqiao 6thArea, Xintian Community, Fuhai Street, Baoan
District, Shenzhen, China

TEL: +86-400-8868-419

FAX: +86-755-27790922

Report Number: NCT22030737XE1-1

Date of Test: Jul. 29, 2022 ~ Aug. 05, 2022

Date of Issue: Aug. 05, 2022



Tested By: Berry Zhao
Berry Zhao

Reported By: Berry Zhao
Berry Zhao

Reviewed By: Jacky Duan
Jacky Duan

The results detailed in this test report relate only to the specific sample(s) tested. It is the Application's responsibility to ensure that all production units are manufactured with equivalent EMC characteristics. This report is not to be reproduced except in full, without written approval from NCT Testing Technology.

Table of contents

1.0 General Information	3
1.1 Client Information	3
1.2 General Description of E.U.T.	3
1.3 Test Facility:	3
2.0 List of Measurement Equipment	4
3.0 Technical Details	5
3.1 Investigations Requested	5
3.2 Test Standards	5
3.3 Performance Criteria	5
3.4 Test standards and Results Summary Tables	6
3.5 Measurement Uncertainty (95% confidence levels, k=2)	6
4.0 Electromagnetic Interference Test results	7
4.1 Power Line Conducted Emission Test	7
4.2 Telecommunication ports Conducted Emission Test	11
4.3 Radiated Emission Test	13
4.4 Harmonic Current Emissions	17
4.5 Flicker and Voltage Fluctuation	18
5.0 Immunity Test	19
5.1 Electrostatic Discharge	19
5.2 RF field strength susceptibility (80MHz----- 1000MHz)	20
5.3 Electrical Fast Transient/Burst (EFT/B) immunity test	21
5.4 Surge test	22
5.5 Conducted Immunity test	23
5.6 Power-Frequency magnetic field test	24
5.7 Voltage Dips/Interruptions immunity test	25
6.0 CE Label	26
7.0 Photos of testing	27

1.0 General Information

1.1 Client Information

Application:	Jiangxi province yunfuheng new energy co. LTD
Address of Application:	Building 9, Double creation base, yichun economic and technological development zone, jiangxi province
Manufacturer:	Jiangxi province yunfuheng new energy co. LTD
Address of Manufacturer:	Building 9, Double creation base, yichun economic and technological development zone, jiangxi province

1.2 General Description of E.U.T.

Product Name:	Lithium ion cell
Model:	YFH18650-2000
Additional Model:	18650-1300 / 1400 / 1500 / 1800 / 2000 / 2200 / 2400 / 2500 / 2600 / 2800 / 3000
Trade Mark:	N/A
Power Supply:	Capacity: 3.7V/2000mAh 7.4Wh

Model Difference:	All models are the same except for model name and capacity or appearance.
Memo:	N/A
Remark:	This test report is only for the test of the main model of the prototype

1.3 Test Facility:

Name of Test Lab:	Shenzhen NCT Testing Technology Co., Ltd
Address of Test Lab:	A101&2FB2, Fuqiao 6thArea, Xintian Community, Fuhai Street, Baoan District, Shenzhen, China
Telephone:	+86-400-8868-419
Fax:	+86-755-27790922

2.0 List of Measurement Equipment					
Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
Conducted emission					
EMI Test Receiver	ESCS30	1102.4500.30	RS	May 05, 2022	May 04, 2023
LISN	LS16C	10010947251	AFJ	May 05, 2022	May 04, 2023
Radiated emission					
EMI Test Receiver	ESVD	1026.5506.10	RS	May 05, 2022	May 04, 2023
Spectrum Analyzer	FSEM	1079.8500.30	RS	May 05, 2022	May 04, 2023
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
Amplifier	8447D	2727A05017	HP	May 05, 2022	May 04, 2023
Bilog Antenna	VULB9163	9163/340	Schwarebeck	May 05, 2022	May 04, 2023
Harmonic & Flicker					
Harmonics Flicker Test System	PACS-1	72305	CI	May 05, 2022	May 04, 2023
5K VA AC Power source	5001iX	56060	CI	May 05, 2022	May 04, 2023
Electrostatic Discharge					
Electostatic Discharge Generator	ESD61002AG	PR12092502	Prima	May 05, 2022	May 04, 2023
Continuous radiated disturbances					
Signal Generator	2022D	119246/003	Maconi	May 05, 2022	May 04, 2023
Power Amplifier	A00181-1000	9801-112	M2S	May 05, 2022	May 04, 2023
Power Amplifier	AC8113/ 800-250A	9801-179	M2S	May 05, 2022	May 04, 2023
Power Antenna	CBL6140A	1204	SCHAFFNER	May 05, 2022	May 04, 2023
EFT/Surge/Dip					
Fast Transient Burst Simulator	EFT61004BG	PR12074375	Prima	May 05, 2022	May 04, 2023
Lightning Surge Generator	SUG61005BG	PR12125534	Prima	May 05, 2022	May 04, 2023
CYCLE SAG SIMULATOR	DRP61011AG	PR12106201	Prima	May 05, 2022	May 04, 2023
Continuous conducted disturbances					
Signal Generator	2022D	119246/003	Maconi	May 05, 2022	May 04, 2023
Power Amplifier	A00181-1000	9801-112	M2S	May 05, 2022	May 04, 2023
CDN	M3-8016	003683	MEB	May 05, 2022	May 04, 2023
Power-frequency Magnetic field					
Continuous Wave Simulator	UCS 500 M4	0304-42	EM TEST	May 05, 2022	May 04, 2023
Power Source Network	MV 2616	0104-14	EM TEST	May 05, 2022	May 04, 2023
Current Transformer	MC2630	--	EM TEST	May 05, 2022	May 04, 2023
Magnetic Coil	MS100	0304-42	EM TEST	May 05, 2022	May 04, 2023

3.0 Technical Details

3.1 Investigations Requested

Perform Electromagnetic Interference [EMI] & Electromagnetic Susceptibility [EMS] tests for CE Marking

3.2 Test Standards

EN IEC 61000-6-3:2021	Electromagnetic compatibility (EMC) - Part 6-3: Generic standards - Emission standard for residential, commercial and light-industrial environments
EN IEC 61000-6-1:2019	Electromagnetic compatibility (EMC) - Part 6-1: Generic standards - Immunity standard for residential, commercial and light-industrial environments
EN IEC 61000-3-2:2019+A1:2021	Electromagnetic compatibility(EMC)- Part 3-2:Limits-Limits for harmonic current emissions(equipment input current $\leq 16A$ per phase)
EN 61000-3-3:2013/A2:2021/AC:2022	Electromagnetic compatibility (EMC)- Part 3-3:Limits-Limitation of voltage changes, Voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current $\leq 16A$ per phase and not subject to conditional connection

3.3 Performance Criteria

- Criterion A During and after the test the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed.
- Criterion B During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.
- Criterion C During and after testing, temporary loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls or cycling of the power to the EUT by the user in accordance with the manufacturer' instructions.
Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

3.4 Test standards and Results Summary Tables

Test Condition	Test Requirement	Test Result
Conducted Emission on AC Mains, 150KHz to 30MHz	EN IEC 61000-6-3	N/A
Conducted Emission on at telecommunication ports, 150KHz to 30MHz	EN IEC 61000-6-3	N/A
Radiated Emissions, 30MHz to 1GHz	EN IEC 61000-6-3	Pass
Harmonic Emissions on AC supply	EN IEC 61000-3-2	N/A
Voltage fluctuations on AC supply	EN 61000-3-3	N/A
Electrostatic Discharge	EN IEC 61000-6-1	Pass
RF field strength susceptibility	EN IEC 61000-6-1	Pass
Electrical Fast transients /Burst Immunity	EN IEC 61000-6-1	N/A
Surge	EN IEC 61000-6-1	N/A
Conducted susceptibility	EN IEC 61000-6-1	N/A
Power-frequency Magnetic Field	EN IEC 61000-6-1	N/A
Dips/Voltage Interruption Variation	EN IEC 61000-6-1	N/A

Note: N/A=Not applicable


3.5 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	MU
1.	Temperature	$\pm 0.1^{\circ}\text{C}$
2.	Humidity	$\pm 1.0\%$
3.	Spurious emissions, conducted	$\pm 3.70\text{dB}$
4.	All emissions, radiated	$\pm 4.50\text{dB}$

4.0 Electromagnetic Interference Test results

4.1 Power Line Conducted Emission Test

4.1.1 Schematics of the test

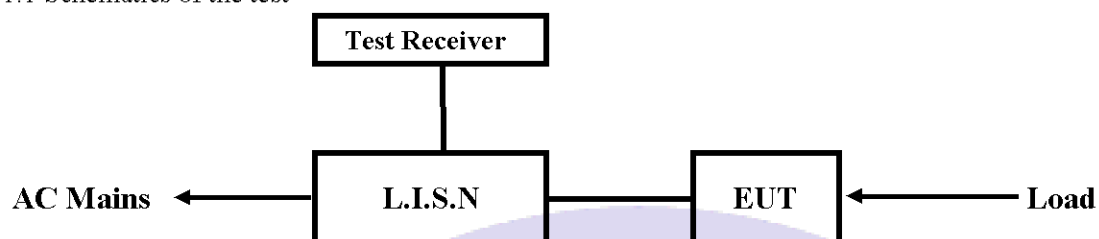


EUT: Equipment Under Test

4.1.2 Test Method and test Procedure

The test was performed in accordance with EN IEC 61000-6-3

Test Voltage: 230V~, 50Hz

Block diagram of Test setup

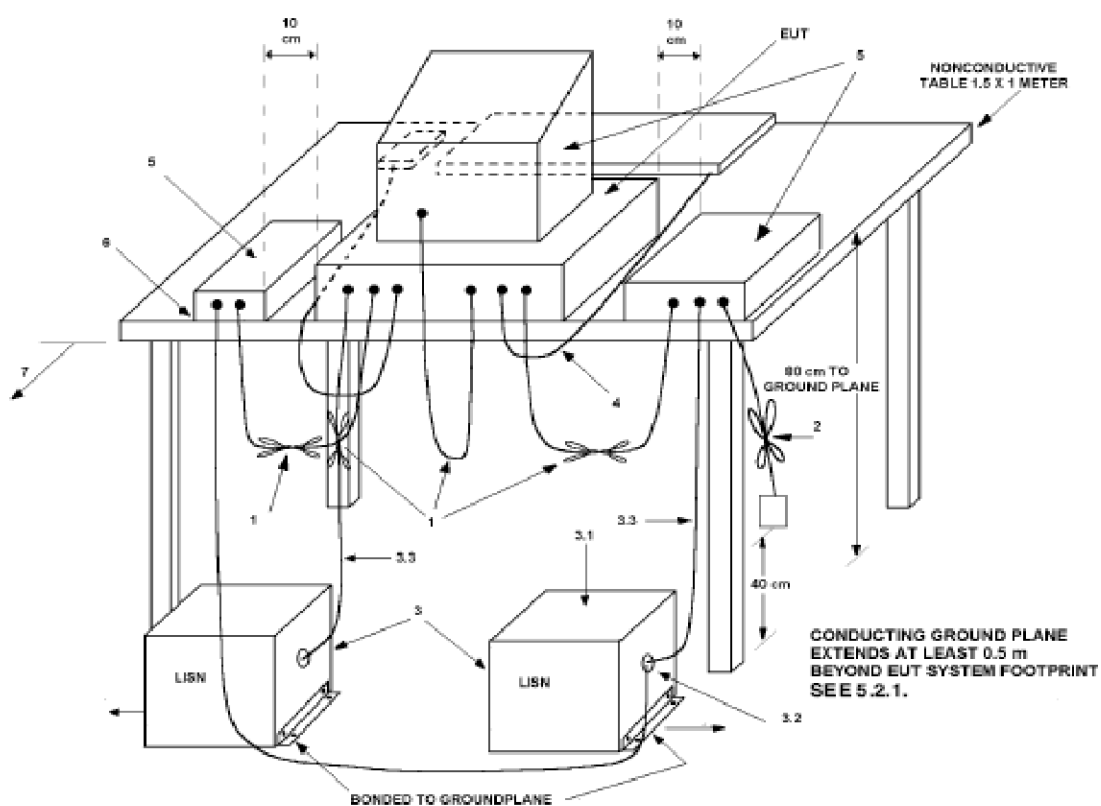

4.1.3 EUT Operating Condition

Operating condition is according to EN IEC 61000-6-3

Setup the EUT and simulators as shown on the following

4.1.4 Test Equipment

Please refer to the Section 2

4.1.5 Power line conducted Emission Limit

Frequency(MHz)	Class A Limits (dBμV)		Class B Limits (dBμV)	
	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	79.0	66.0	66.0~56.0*	56.0~46.0*
0.50 ~ 5.00	73.0	60.0	56.0	46.0
5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The tighter limit shall apply at the transition frequencies

4.1.6 Photo documentation of the test set-up

Please refer to the Section 7

4.1.7 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 50% Atmospheric pressure: 103kPa

Frequency range: 0.15 MHz – 30 MHz

4.1.8 Test result

N/A

The requirements are FULFILLED

Remarks: According to the EN IEC 61000-6-3

A Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT Description: --
 Operation Mode: --
 Tested By: --
 Test date: --
 Test Result: --

Start Frequency Stop Frequency Step IF BW Detector Final M-Time
 0.15MHz 30MHz 4.5KHz 10KHz QP+AV 1s

Frequency (MHz)	Reading(dBμV)				Limit (dBμV)	
	Live		Neutral		Quasi-peak	Average
	Quasi-peak	Average	Quasi-peak	Average		
			--	--		
			--	--		

Remark: The test item is not applicable.

B Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT Description: --
 Operation Mode: --
 Tested By: --
 Test date: --
 Test Result: --


Start Frequency Stop Frequency Step IF BW Detector Final M-Time
 0.15MHz 30MHz 4.5KHz 10KHz QP+AV 1s

Frequency (MHz)	Reading(dBμV)				Limit (dBμV)	
	Live		Neutral			
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
	--	--				
	--	--				

Remark: The test item is not applicable.

4.2 Telecommunication ports Conducted Emission Test

4.2.1 Test Method: The test was performed in accordance with EN 61000-6-3

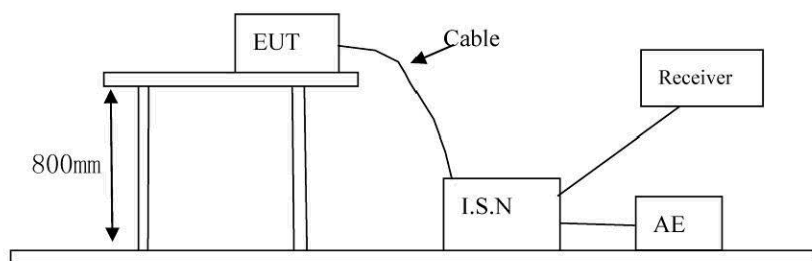

4.2.2 EUT Operating Condition

Operating condition is according to EN 61000-6-3

4.2.3 Test Equipment

Please refer to the Section 2

4.2.4 Power line conducted Emission Limit

Frequency(MHz)	Class A Limits (dBμV)		Class B Limits (dBμV)	
	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	97 to 87	84 to 74	84 to 74	74 to 64
0.50 ~ 30.00	87	74	74	64

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The tighter limit shall apply at the transition frequencies

4.2.5 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 50% Atmospheric pressure: 103kPa

Frequency range: 0.15 MHz – 30 MHz

4.2.6 Test result N/A

The requirements are FULFILLED

Remarks: According to the EN 61000-6-3

A Conducted Emission on Telecommunication port (150kHz to 30MHz)

EUT Description: --
 Operation Mode: --
 Tested By: --
 Test date: --
 Test Result: --


Start Frequency Stop Frequency Step IF BW Detector Final M-Time
 0.15MHz 30MHz 4.5KHz 10KHz QP+AV 1s

Frequency (MHz)	Port	Reading(dBμA)		Limit(dBμA)	
		Quasi-peak	Average	Quasi-peak	Average

Remark: The test item is not applicable.


4.3 Radiated Emission Test

4.3.1 Schematics of the test



4.3.2 Test Method: The test was performed in accordance with EN 61000-6-3

Block diagram of Test setup

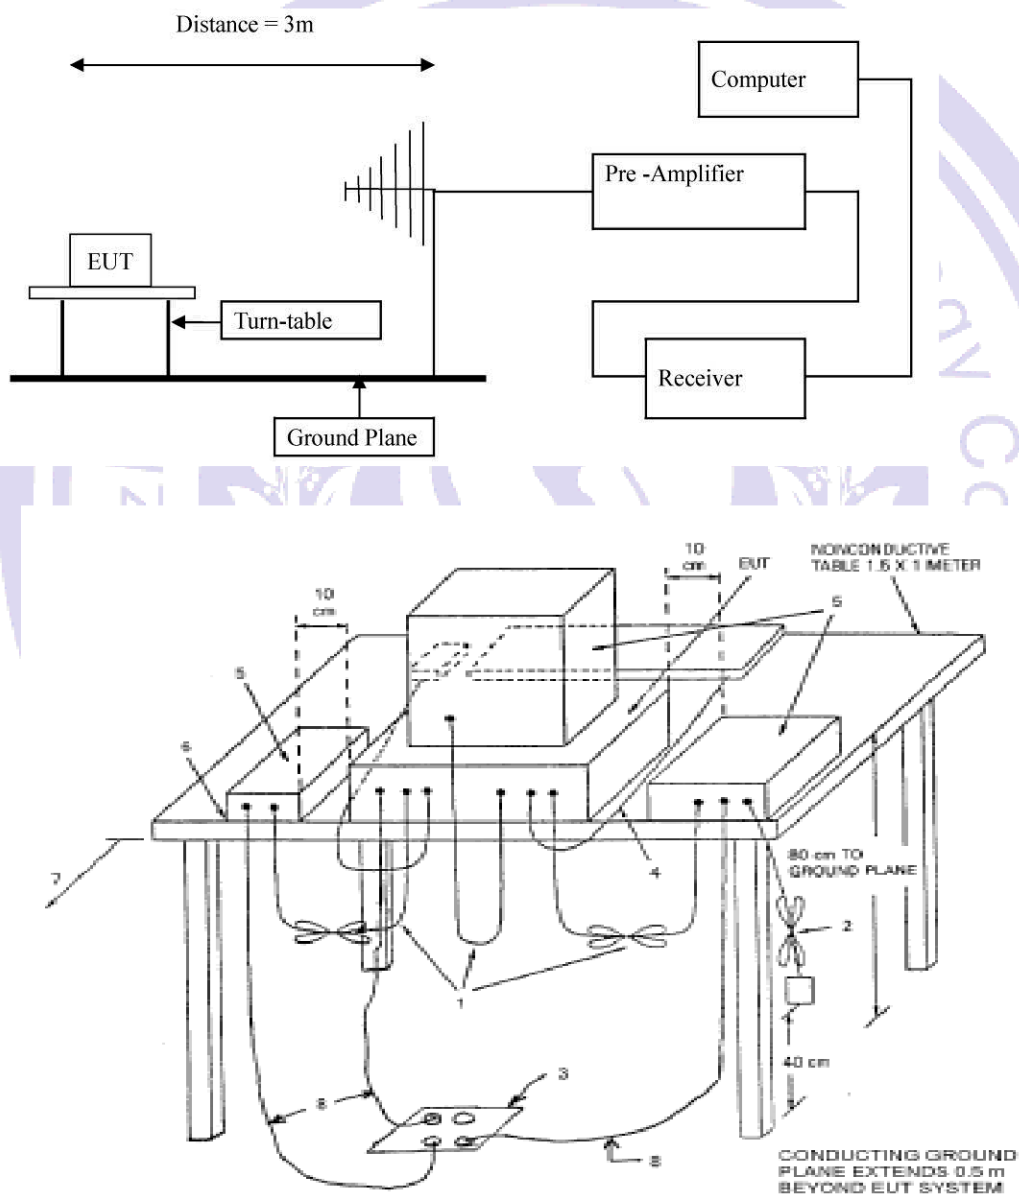

4.3.3 EUT Operating Condition

Operating condition is according to EN 61000-6-3

4.3.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequency Range (MHz)	Distance (m)	Quasi-Peak limits (dB μ V/m)	
		Class A Limits	Class B Limits
30-230	3	50.00	40.00
230-1000	3	57.00	47.00

Note: 1) The lower limit shall apply at the transition frequencies
2) If measurement is not made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula $L_{d1} = L_{d2} * (d_2/d_1)$

4.3.5 Photo documentation of the test set-up

Please refer to the Section 7

4.3.6 Test Equipment:

Please refer to the Section 2

4.3.7 Test specification:


Environmental conditions: Temperature 26° C Humidity: 56% Atmospheric pressure: 103kPa

4.3.8 Test result Pass

The requirements are FULFILLED

Remarks: According to the EN 61000-6-3

A. Radiated Emission In Horizontal (30MHz----1000MHz)

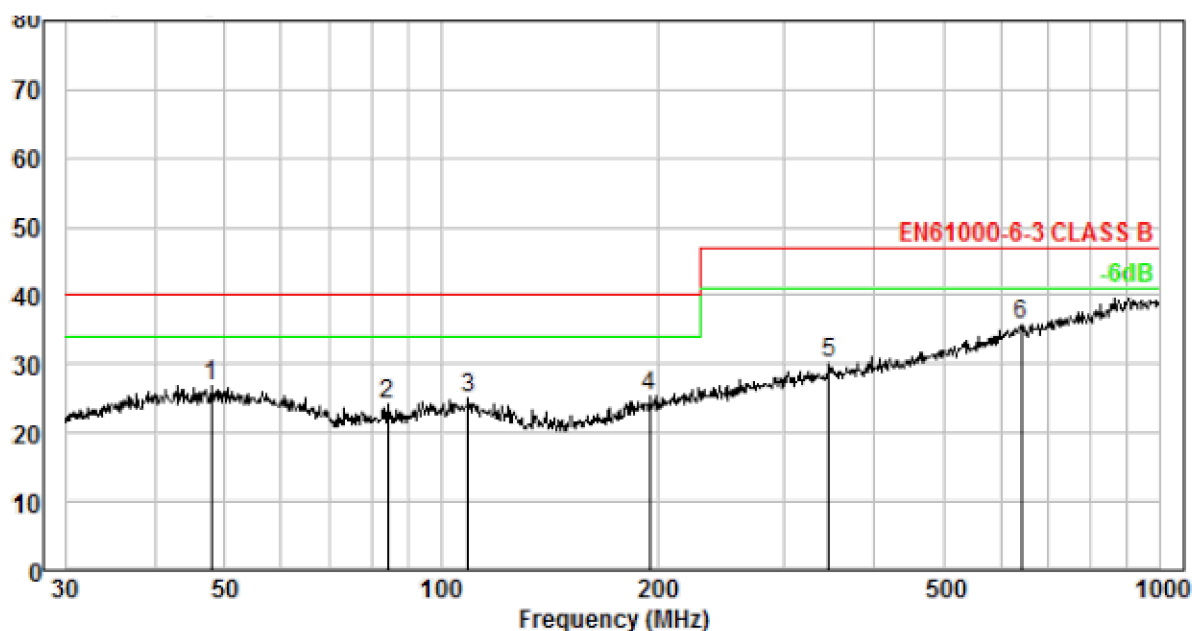

Radiated Emission Test

Test Site : 3m chamber


Env. Cond. : Temp.: 24.2°C Humi.: 55% Pressure: 101.3kPa

Polarity : HORIZONTAL

Limit : EN61000-6-3 CLASS B

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBμV	Preamp Gain dB	Emission Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
1	47.826	0.41	12.66	13.78	0.00	26.85	40.00	-13.15	QP
2	84.405	0.63	9.79	13.70	0.00	24.12	40.00	-15.88	QP
3	109.029	0.74	11.19	13.12	0.00	25.05	40.00	-14.95	QP
4	195.137	1.05	11.26	13.11	0.00	25.42	40.00	-14.58	QP
5	346.809	1.35	15.06	13.84	0.00	30.25	47.00	-16.75	QP
6	640.611	1.78	19.58	14.46	0.00	35.82	47.00	-11.18	QP

B. Radiated Emission In Vertical (30MHz----1000MHz)

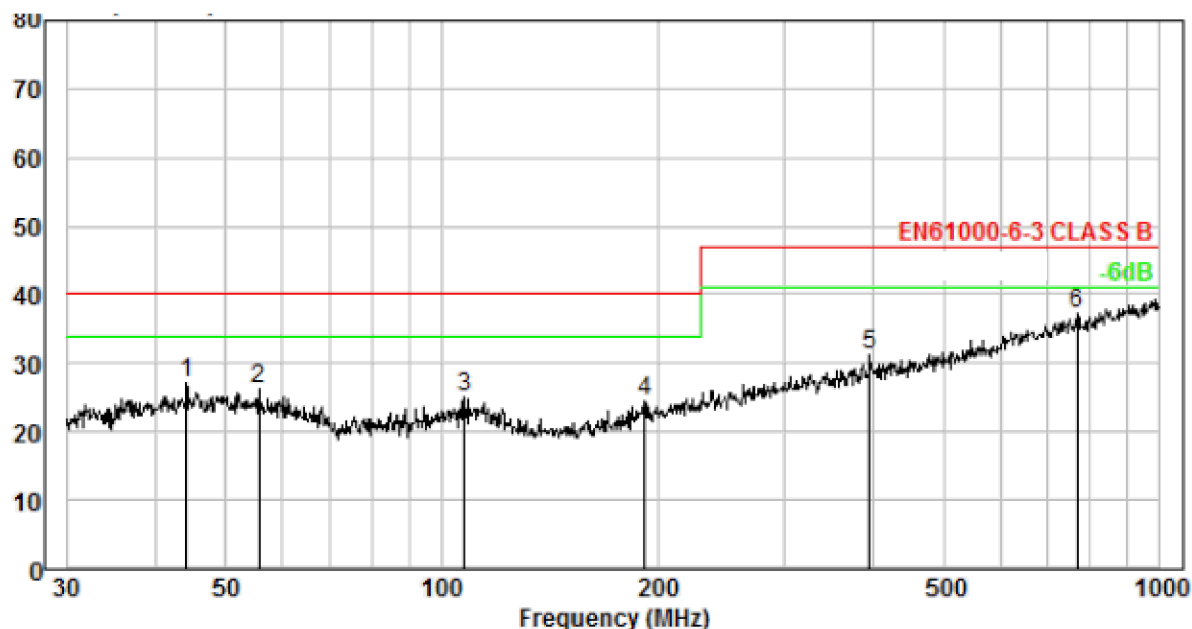

Radiated Emission Test

Test Site : 3m chamber

Env. Cond. : Temp.: 24.2°C Humi.: 55% Pressure: 101.3kPa

Polarity : VERTICAL

Limit : EN61000-6-3 CLASS B


No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dB μ V	Preamp Gain dB	Emission Level dB μ V/m	Limit dB μ V/m	Over Limit dB	Remark
1	44.120	0.38	12.59	14.19	0.00	27.16	40.00	-12.84	QP
2	55.609	0.47	12.12	13.61	0.00	26.20	40.00	-13.80	QP
3	107.510	0.73	11.18	13.14	0.00	25.05	40.00	-14.95	QP
4	191.745	1.04	11.15	12.45	0.00	24.64	40.00	-15.36	QP
5	394.855	1.42	15.73	14.26	0.00	31.41	47.00	-15.59	QP
6	768.748	1.95	21.13	13.99	0.00	37.07	47.00	-9.93	QP

4.4 Harmonic Current Emissions

4.4.1 EUT Operating Mode

--

4.4.2 Block Diagram of Test Setup.

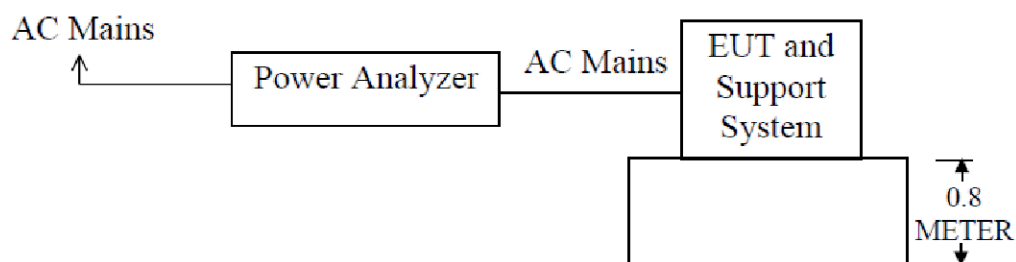

This test was performed as per EMC Basic Standard EN IEC 61000-3-2 Class A

4.4.3 Test Equipment

Please refer to Section 2 this report.

4.4.4 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 54% Atmospheric pressure: 103kPa

4.4.5 Results

Port	EUT Operating mode	Result (Passed / Failed)
AC Input	Full load	N/A


Remark: The test item is not applicable.

4.5 Flicker and Voltage Fluctuation

4.5.1 EUT Operating Mode

Load

4.5.2 Block Diagram of Test Setup.

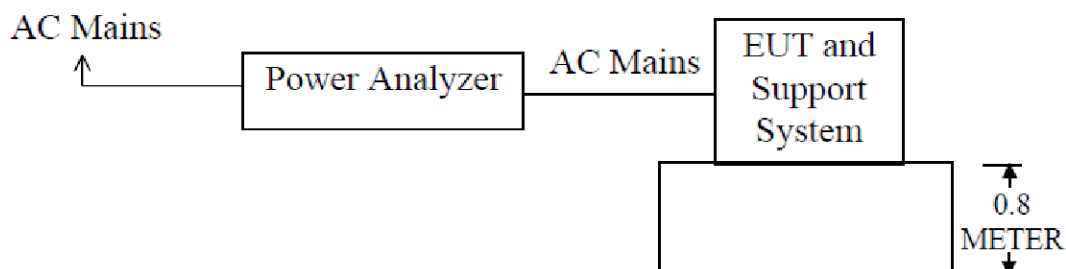

This test was performed as per EMC Basic Standard EN EN 61000-3-3

4.5.3 Limits of Voltage Fluctuation and Flicks Measurement

Test Item	Limit	Note
P_{st}	1.0	P_{st} means short-term flicker indicator
P_{lt}	0.65	P_{lt} means long-term flicker indicator
T_{dt} (ms)	200	T_{dt} means maximum time that dt exceeds 3%.
d_{max} (%)	4	D_{max} means maximum relative voltage change.
dc (%)	3	D_c means relative steady-state voltage change.

4.5.4 Test Equipment

Please refer to Section 2 this report.

4.5.5 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 54% Atmospheric pressure: 103kPa

4.5.6 Results


Port	EUT Operating mode	Result (Passed / Failed)
AC Input	Full load	N/A

Remark: The test item is not applicable.

5.0 Immunity Test

5.1 Electrostatic Discharge

5.1.1 Schematic of the test

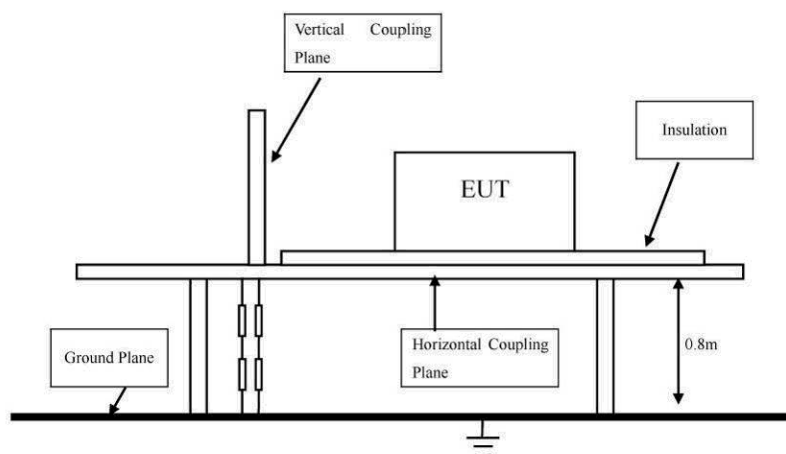

5.1.2 Test method

The test was performed in accordance with EN 61000-6-1

5.1.3 Test severity

±4kV for direct & in-direct Contact Discharge

±8kV for air Discharge

Performance Criterion Require: **B**

5.1.4 Test Equipment

Please refer to Section 2 this report.

5.1.5 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 54% Atmospheric pressure: 103kPa

5.1.6 Operation mode:

Discharging Mode

5.1.7 Discharge location

- HCP
- VCP
- Shell
- OUT Port

5.1.8 Test Result

Pass

5.2 RF field strength susceptibility (80MHz----- 1000MHz)

5.2.1 Test Method:


The test was performed in accordance with EN 61000-6-1

Severity: Level 2 (3V/m)

Modulation: 1 KHz 80% AM

Performance Criterion Require: A

Block diagram of Test setup

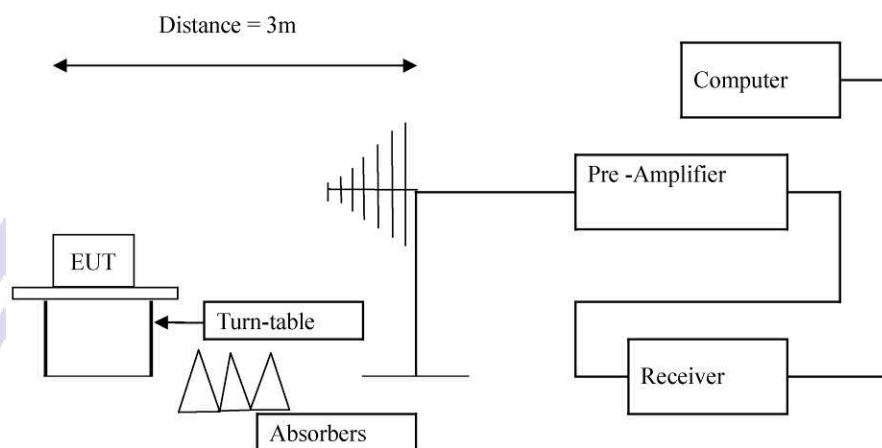

5.2.2 Test Equipment

Please refer to Section 2 this report.

5.2.3 Test specification:

Environmental conditions: Temperature: 25° C Humidity: 54% Atmospheric pressure: 103kPa

5.2.4 Operation mode:

Discharging Mode


5.2.5 Test Result:

Please refer to the following table for individual results.

Frequency (MHz)	Radiation to	Polarity	Level (V/m)	Dwell Time(s)	Sweep Rate (%)	Results
80-1000	Front	H/V	3	1	1	Pass
80-1000	Rear	H/V	3	1	1	Pass
80-1000	Left	H/V	3	1	1	Pass
80-1000	Right	H/V	3	1	1	Pass
1400-6000	Front	H/V	3	1	1	Pass
1400-6000	Rear	H/V	3	1	1	Pass
1400-6000	Left	H/V	3	1	1	Pass
1400-6000	Right	H/V	3	1	1	Pass

5.3 Electrical Fast Transient/Burst (EFT/B) immunity test

5.3.1 Schematics of the test




5.3.2 Test Method

The test was performed in accordance with EN 61000-6-1

Severity: Level 2 (1kV)

Performance Criterion Require: **B**

Block diagram of Test setup

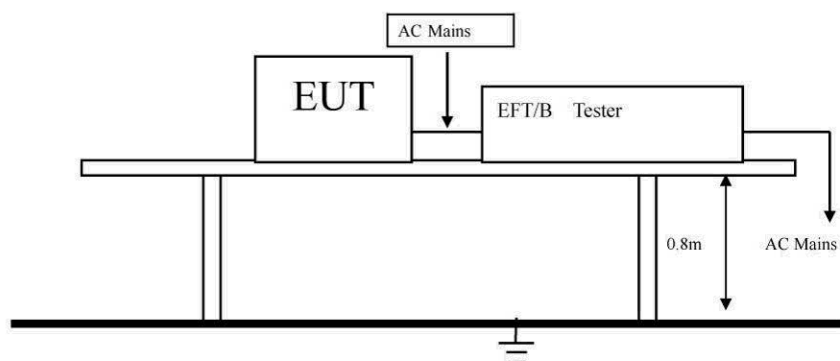

5.3.3 Test Equipment

Please refer to Section 2 this report.

5.3.4 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 54% Atmospheric pressure: 103kPa

5.3.5 Operation mode:

--

5.3.6 Test Results

Inject location: AC mains

Inject Line	Voltage kV	Inject Times (s)	Method	Results
L	±1	120	Direct	N/A
N	±1	120	Direct	N/A
L、N	±1	120	Direct	N/A
E	±1	120	Direct	N/A
L、E	±1	120	Direct	N/A
N、E	±1	120	Direct	N/A
L、N、E	±1	120	Direct	N/A

Remark: The test item is not applicable.

5.4 Surge test

5.4.1 Schematics of the test




5.4.2 Test Method:

The test was performed in accordance with EN 61000-6-1

Severity: Level 2

Performance Criterion Require: B

Block diagram of Test setup

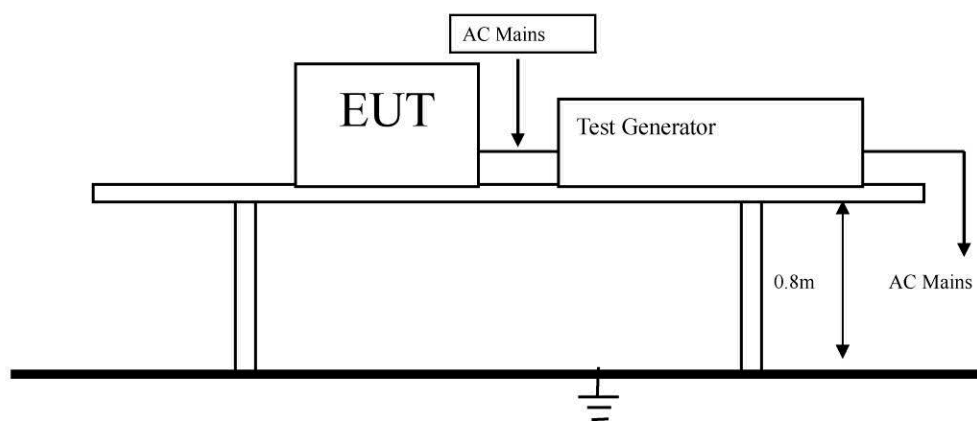

5.4.3 Test Equipment

Please refer to Section 2 this report.

5.4.4 Test specification:

Environmental conditions: Temperature: 22° C Humidity: 54% Atmospheric pressure: 103kPa

5.4.5 Operation mode:

--

5.4.6 Test Results


5 pulses for each polarity and test voltage, and repetition rate is 1 per min.

Location	Polarity	0°	90°	180°	270°	Results
L-N	± 1 KV	N/A	N/A	N/A	N/A	N/A
L-PE	± 2 KV	N/A	N/A	N/A	N/A	N/A
N-PE	± 2 KV	N/A	N/A	N/A	N/A	N/A

Remark: The test item is not applicable.

5.5 Conducted Immunity test

5.5.1 Schematics of the test

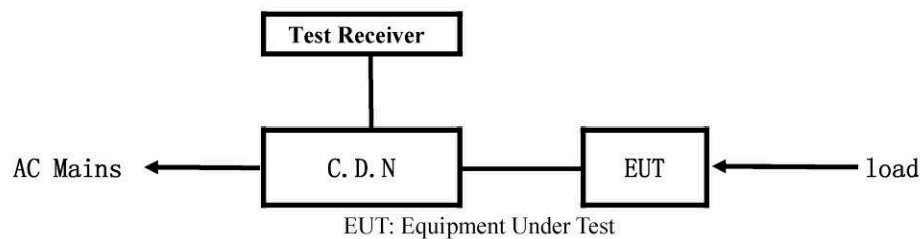


5.5.2 Test Method

The test was performed in accordance with EN 61000-6-1

Severity: Level 2 (3 V rms), 0.15MHz—80MHz

Performance Criterion Require: A

Block diagram of Test setup

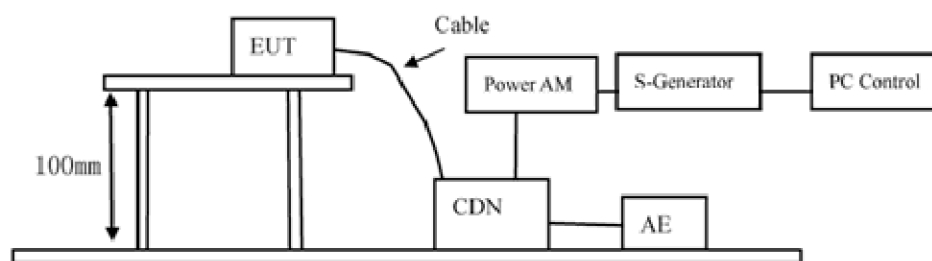

5.5.3 Test Equipment

Please refer to Section 2 this report.

5.5.4 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 54% Atmospheric pressure: 103kPa

5.5.5 Operation mode:

--

5.5.6 Test Results:

Frequency Range (MHz)	Injected Position	Strength	Criterion	Result
0.15 - 80	AC Line	3V (rms) Unmodulated	A	N/A

Remark: The test item is not applicable.

5.6 Power-Frequency magnetic field test

5.6.1 Schematics of the test




5.6.2 Test Method

The test was performed in accordance with EN 61000-6-1

Severity: Level 1 (1A/m),

Performance Criterion Require: A

Block diagram of Test setup

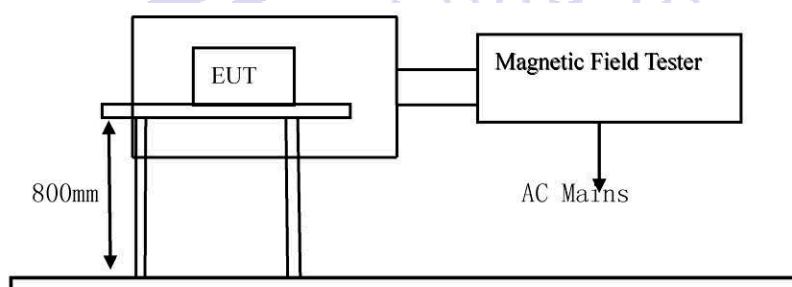

5.6.3 Test Equipment

Please refer to Section 2 this report.

5.6.4 Test specification:

Environmental conditions: Temperature: 22° C Humidity: 54% Atmospheric pressure: 103kPa

5.6.5 Operation mode:

--


5.6.6 Test Results:

Test Level	Testing Duration	Coil Orientation	Criterion	Result
1A/m	5 Mins	X	A	N/A
1A/m	5 Mins	Y	A	N/A
1A/m	5 Mins	Z	A	N/A

Remark: The test item is not applicable.

5.7 Voltage Dips/Interruptions immunity test

5.7.1 Schematics of the test




5.7.2 Test Method:

The test was performed in accordance with EN 61000-6-1

Performance Criterion Require: C&B

Block diagram of Test setup

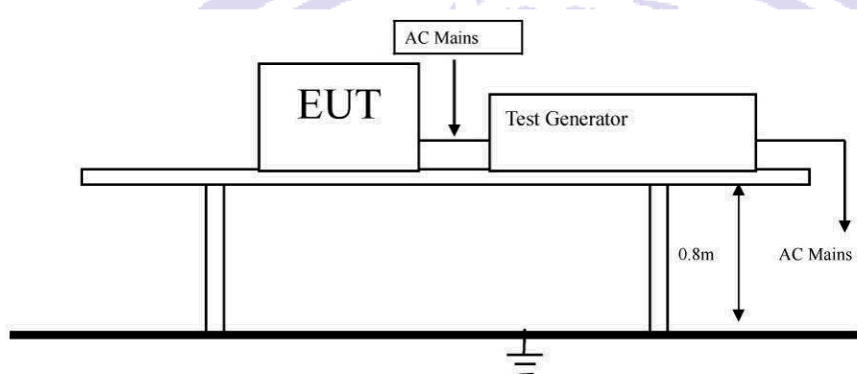

5.7.3 Test Equipment

Please refer to Section 2 this report.

5.7.4 Test specification:

Environmental conditions: Temperature: 22° C Humidity: 54% Atmospheric pressure: 103kPa

5.7.5 Operation mode:

--

5.7.6 Test Result:

Voltage Dip: Voltage Interceptions:

Test Level % Ut	Reduction	Duration (periods)	Phase Angle	Meet Criterion	Result
0	100	0.5	0° - 360°	B	N/A
0	100	1	0° - 360°	C	N/A
70	30	25	0° - 360°	C	N/A
0	100	250	0° - 360°	C	N/A

Remark: The test item is not applicable.


6.0 CE Label**6.1 label specification**

Text of the mark is black or white in color and is left justified. Labels are printed in indelible ink on permanent adhesive backing and shall be affixed at a conspicuous location on the EUT or silk-screened onto the EUT.


**6.2 Mark Location: On the product body**

7.0 Photos of testing

Radiated Emission Test View

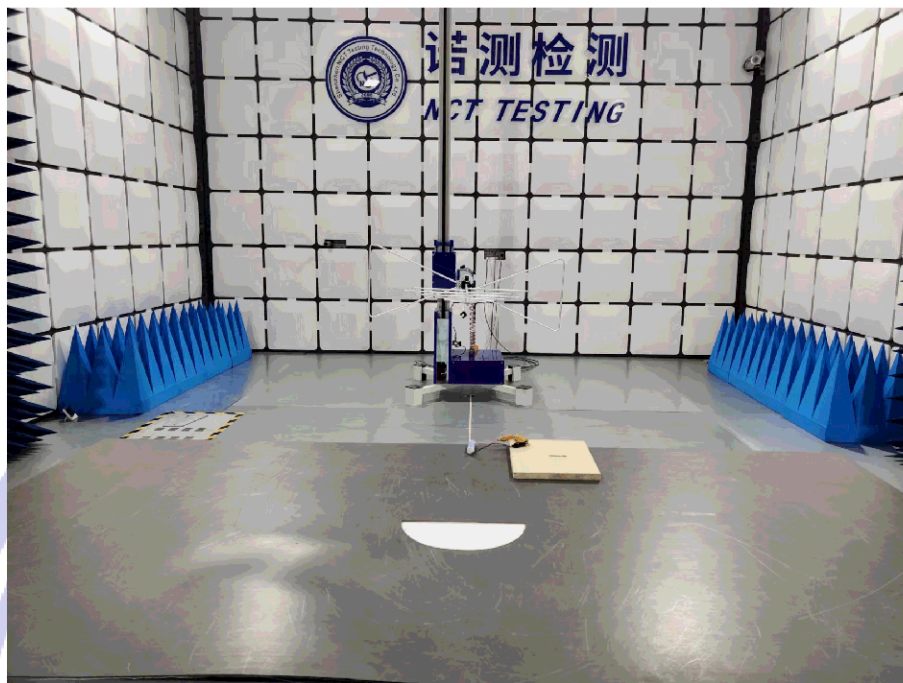


ESD Test View

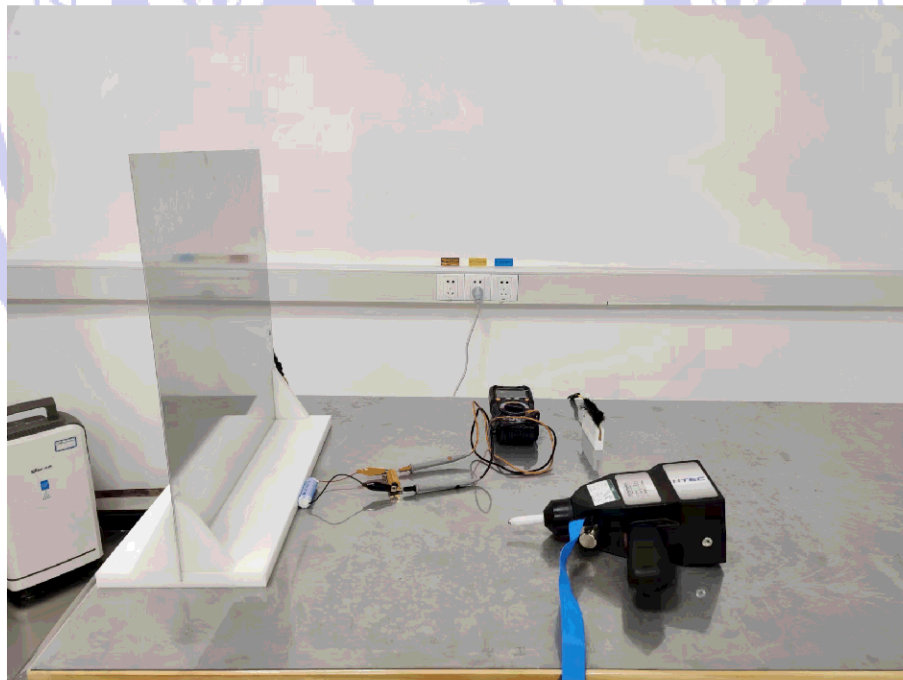

8.0 Photos of the EUT



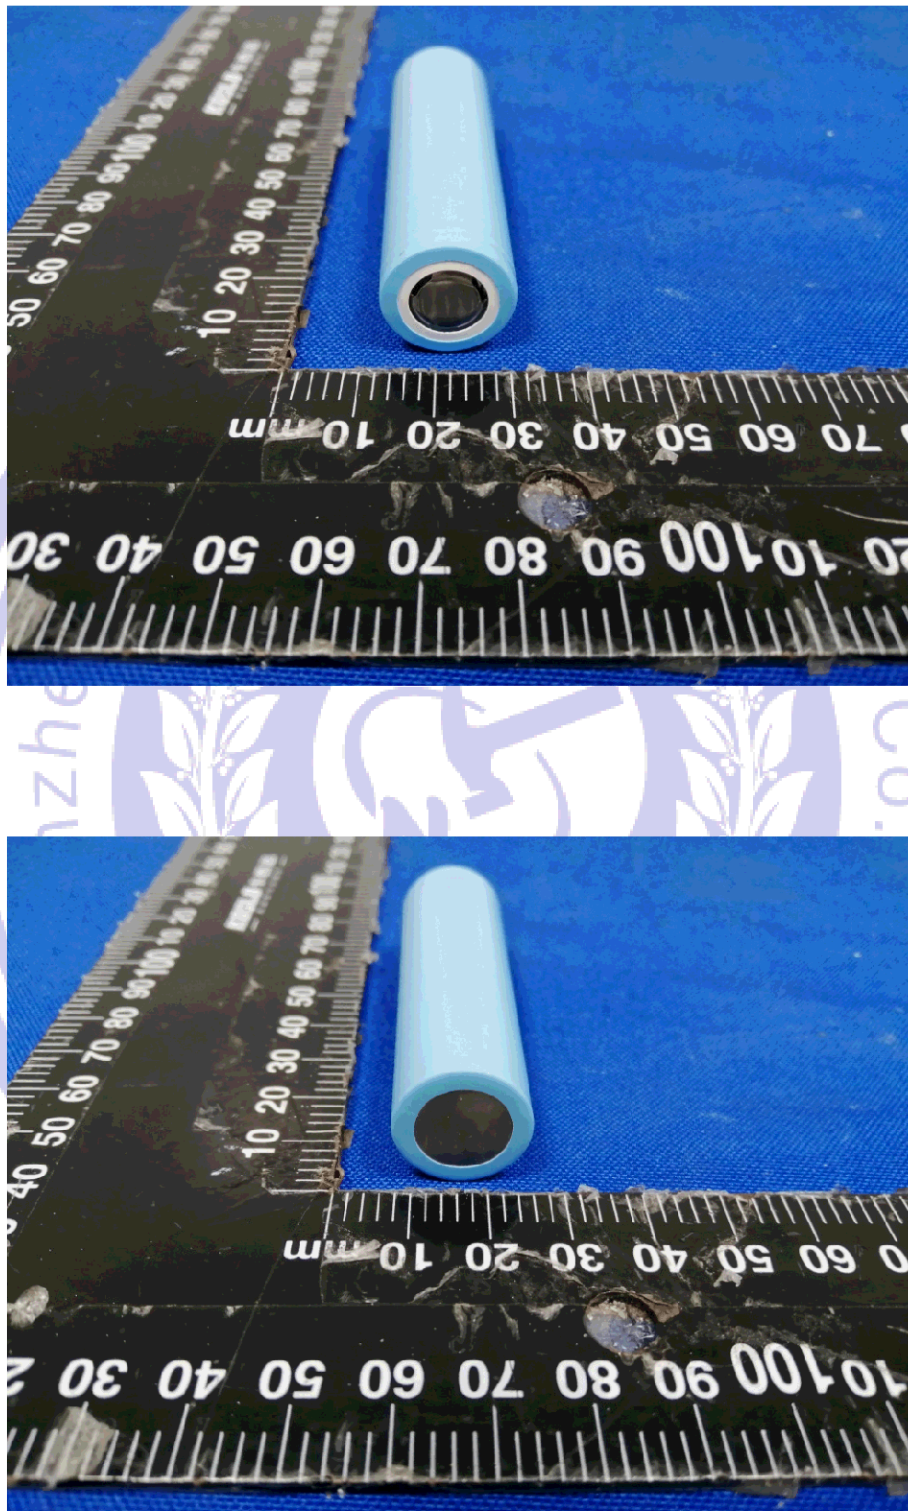

--End of the report--